

# MK pompen B.V.

Weihoek 1, 4416 PX Kruijningen



Tel. 06 - 50 28 75 99

E-mail: info@mkpompen.nl

www.mkpompen.nl




POMPEN | ONDERDELEN | REVISIE | APPENDAGES | BELZONA COATING

Frame	Pole	D	E	F	G
80	2-8	19	40	6	15.5
90S	2-8	24	50	8	20
90L	2-8	24	50	8	20
100L	2-8	28	60	8	24
112M	2-8	28	60	8	24
132S	2-8	38	80	10	33
132M	2-8	38	80	10	33
160M	2-8	42	110	12	37
160L	2-8	42	110	12	37
180M	2.4	48	110	14	42.5
180L	4-8	48	110	14	42.5
200L	2-8	55	110	16	49
225S	4-8	60	140	18	53
225M	2	55	110	16	49
	4-8	60	140	18	53
250M	2	60	140	18	53
	4-8	65	140	18	58
280S	2	65	140	18	58
	4-8	75	140	20	67.5
280M	2	65	140	18	58
	4-8	75	140	20	67.5
315S	2	65	140	18	58
	4-8	80	170	22	71
315M	2	65	140	18	58
315L	4-8	80	170	22	71
355M	2	75	140	20	67.5
355L	4-8	95	170	25	86
400M	2	80	170	22	71
400L	4-8	110	210	28	100

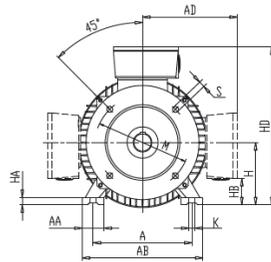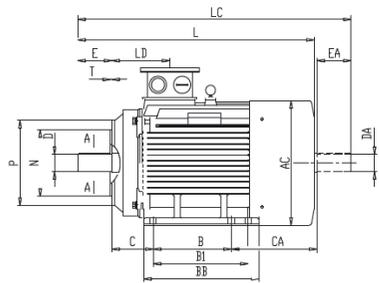

B34A B34B

B35

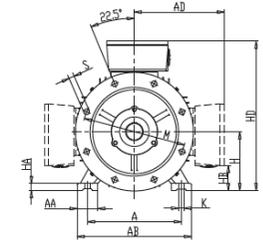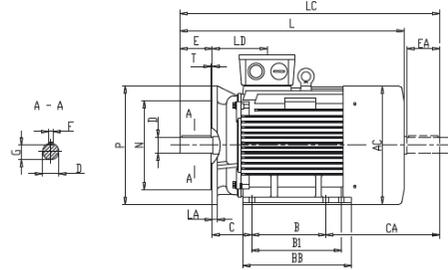

B34A

Frame	Pole	Dimension													Dimension										
		A	B	C	CA	H	K	M	N	P	R	S	T	AA	AB	AC	AD	BB	HA	HB	HD		LD	L	LC
		TOP		SIDE																					
80	2-8	125	100	50	98	80 <sub>0.5x</sub>	10	100	80	120	0	4-M6	3	35	160	160	145	130	12	36	225	160	75	280	336
90S	2-8	140	100	56	117	90 <sub>0.5x</sub>	10	115	95	140	0	4-M8	3	36	180	180	155	140	12	50	245	180	75	315	373
90L	2-8	140	125	56	117	90 <sub>0.5x</sub>	10	115	95	140	0	4-M8	3	36	180	180	155	165	12	50	245	180	75	340	373
100L	2-8	160	140	63	120	100 <sub>0.5x</sub>	12	130	110	160	0	4-M8	3.5	40	200	200	180	175	14	55	280	200	83	375	443
112M	2-8	190	140	70	138	112 <sub>0.5x</sub>	12	130	110	160	0	4-M8	3.5	45	230	220	190	180	15	60	305	222	87	400	468
132S	2-8	216	140	89	164	132 <sub>0.5x</sub>	12	165	130	200	0	4-M10	4	55	265	260	220	190	18	65	355	262	102	465	553
132M	2-8	216	178	89	146	132 <sub>0.5x</sub>	12	165	130	200	0	4-M10	4	55	265	260	220	230	18	65	355	262	102	505	593

B34B

Frame	Pole	Dimension													Dimension										
		A	B	C	CA	H	K	M	N	P	R	S	T	AA	AB	AC	AD	BB	HA	HB	HD		LD	L	LC
		TOP		SIDE																					
80	2-8	125	100	50	98	80 <sub>0.5x</sub>	10	130	110	160	0	4-M8	3.5	35	160	160	145	130	12	36	225	160	75	280	336
90S	2-8	140	100	56	117	90 <sub>0.5x</sub>	10	130	110	160	0	4-M8	3.5	36	180	180	155	140	12	50	245	180	75	315	373
90L	2-8	140	125	56	117	90 <sub>0.5x</sub>	10	130	110	160	0	4-M8	3.5	36	180	180	155	165	12	50	245	180	75	340	373
100L	2-8	160	140	63	120	100 <sub>0.5x</sub>	12	165	130	200	0	4-M8	3.5	40	200	200	180	175	14	55	280	200	83	375	443
112M	2-8	190	140	70	138	112 <sub>0.5x</sub>	12	165	130	200	0	4-M8	3.5	45	230	220	190	180	15	60	305	222	87	400	468
132S	2-8	216	140	89	164	132 <sub>0.5x</sub>	12	215	180	250	0	4-M10	4	55	265	260	220	190	18	65	355	262	102	465	553
132M	2-8	216	178	89	146	132 <sub>0.5x</sub>	12	215	180	250	0	4-M10	4	55	265	260	220	230	18	65	355	262	102	505	593

Frame	Pole	Dimension													Dimension												
		A	B	B1	C	CA	H	K	M	N	P	R	S	T	AA	AB	AC	AD	BB	HA	HB	HD		LA	LD	L	LC
		TOP		SIDE																							
80	2-8	125	100	-	50	98	80 <sub>0.5x</sub>	10	165	130	200	0	4-Φ12	4	35	160	160	145	130	12	36	225	160	12	75	280	336
90S	2-8	140	100	-	56	117	90 <sub>0.5x</sub>	10	165	130	200	0	4-Φ12	4	36	180	180	155	140	12	50	245	180	12	75	315	373
90L	2-8	140	125	-	56	117	90 <sub>0.5x</sub>	10	165	130	200	0	4-Φ12	4	36	180	180	155	165	12	50	245	180	12	75	340	373
100L	2-8	160	140	-	63	120	100 <sub>0.5x</sub>	12	215	180	250	0	4-Φ15	4	40	200	200	180	175	14	55	280	200	13	83	375	443
112M	2-8	190	140	-	70	138	112 <sub>0.5x</sub>	12	215	180	250	0	4-Φ15	4	45	230	220	190	180	15	60	305	222	14	87	400	468
132S	2-8	216	140	-	89	164	132 <sub>0.5x</sub>	12	265	230	300	0	4-Φ15	4	55	265	260	220	190	18	65	355	262	14	102	465	553
132M	2-8	216	178	-	89	146	132 <sub>0.5x</sub>	12	265	230	300	0	4-Φ15	4	55	265	260	220	230	18	65	355	262	14	102	505	593
160M	2-8	254	210	-	108	188	160 <sub>0.5x</sub>	15	300	250	350	0	4-Φ19	5	65	315	315	265	260	20	81	425	385	15	146	608	726
160L	2-8	254	254	-	108	188	160 <sub>0.5x</sub>	15	300	250	350	0	4-Φ19	5	65	315	315	265	305	20	81	425	385	15	146	652	770
180M	2.4	279	241	-	121	226	180 <sub>0.5x</sub>	15	300	250	350	0	4-Φ19	5	70	350	360	280	315	22	105	460	420	15	161	690	808
180L	4-8	279	279	-	121	228	180 <sub>0.5x</sub>	15	300	250	350	0	4-Φ19	5	70	350	360	280	350	22	105	460	420	15	161	730	848
200L	2-8	318	305	-	133	220	200 <sub>0.5x</sub>	19	350	300	400	0	4-Φ19	5	70	390	400	310	370	25	85	510	475	17	186	760	878
225S	4-8	356	286	-	149	243	225 <sub>0.5x</sub>	19	400	350	450	0	4-Φ19	5	75	435	450	335	370	28	110	555	535	20	189	810	928
225M	2	356	311	-	149	243	225 <sub>0.5x</sub>	19	400	350	450	0	4-Φ19	5	75	435	450	335	395	28	110	555	535	20	189	805	923
	4-8	356	311	-	149	198	225 <sub>0.5x</sub>	19	400	350	450	0	4-Φ19	5	75	435	450	335	395	28	110	555	535	20	189	835	953
250M	2	406	349	-	168	261	250 <sub>0.5x</sub>	24	500	450	550	0	4-Φ19	5	80	485	485	375	445	30	110	625	570	22	207	910	1028
	4-8	406	349	-	168	261	250 <sub>0.5x</sub>	24	500	450	550	0	4-Φ19	5	80	485	485	375	445	30	120	625	570	22	207	910	1028
280S	2	457	368	-	190	295	280 <sub>0.5x</sub>	24	500	450	550	0	4-Φ19	5	85	545	550	405	490	35	142	685	660	22	215	985	1103
	4-8	457	368	-	190	315	280 <sub>0.5x</sub>	24	500	450	550	0	4-Φ19	5	85	545	550	405	490	35	142	685	660	22	215	1005	1153
280M	2	457	419	-	190	289	280 <sub>0.5x</sub>	24	500	450	550	0	4-Φ19	5	85	545	550	405	540	35	142	685	660	22	215	1030	1148
	4-8	457	419	-	190	319	280 <sub>0.5x</sub>	24	500	450	550	0	4-Φ19	5	85	545	550	405	540	35	142	685	660	22	215	1060	1208
315S	2	508	406	-	216	426	315 <sub>0.5x</sub>	28	600	550	660	0	4-Φ24	6	120	630	625	530	570	45	110	845	750	22	257	1180	1328
	4-8	508	406	-	216	426	315 <sub>0.5x</sub>	28	600	550	660	0	4-Φ24	6	120	630	625	530	570	45	110	845	750	22	257	1210	1358
315M	2	508	457	508	216	485	315 <sub>0.5x</sub>	28	600	550	660	0	4-Φ24	6	120	630	625	530	680	45	110	845	750	22	257	1290	1438
315L	4-8	508	457	508	216	485	315 <sub>0.5x</sub>	28	600	550	660	0	4-Φ24	6	120	630	625	530	680	45	110	845	750	22	257	1320	1498
355M	2	610	500	560	254	640	355 <sub>0.5x</sub>	28	740	680	800	0	4-Φ24	6	120	730	700	615	570	52	110	970	830	25	284	1528	1674
	4-8	610	500	560	254	640	355 <sub>0.5x</sub>	28	740	680	800	0	4-Φ24	6	120	730	700	615	750	52	110	970	830	25	284	1556	1734
355L	2	610	560	630	254	580	355 <sub>0.5x</sub>	28	740	680	800	0	4-Φ24	6	12												