


## MK-KLEPAFSLUITER

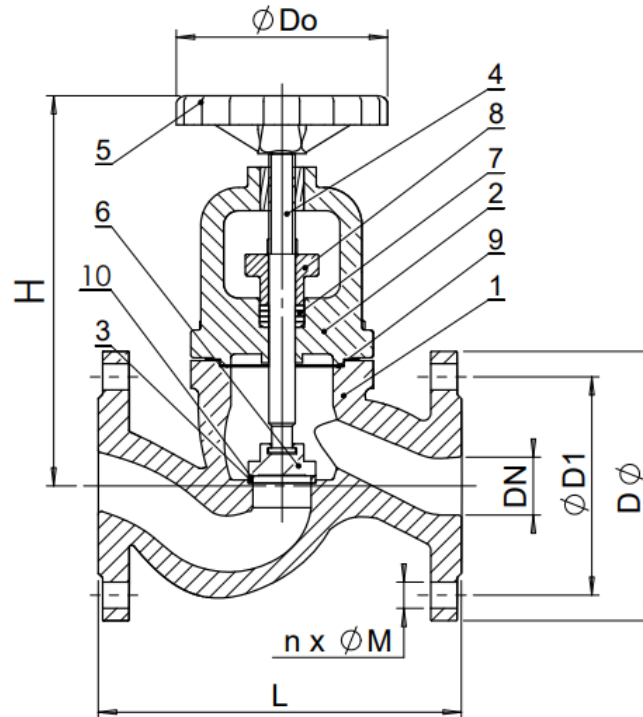

### DIMENSIONS

DN		L	ØD	ØD1	Do	H	n x Ø M	Weight (kg)
mm	inch							
15	1/2"	130	95	65	100	161,5	4 x 14	3
20	3/4"	150	105	75	100	169	4 x 14	4
25	1"	160	115	85	120	187	4 x 14	5,5
32	1"1/4	180	140	100	120	223	4 x 19	8
40	1"1/2	200	150	110	140	233,5	4 x 19	11
50	2"	230	165	125	140	261,5	4 x 19	14,7
65	2"1/2	290	185	145	200	293	4 x 19	17,8
80	3"	310	200	160	200	341	8 x 19	26,7
100	4"	350	220	180	240	381	8 x 19	35,4
125	5"	400	250	210	280	419	8 x 19	59
150	6"	480	285	240	315	485	8 x 23	78
200	8"	600	340	295	360	569	12 x 23	136
250	10"	730	405	355	400	634	12 x 28	212,5
300	12"	850	460	410	400	801	12 x 28	321

### WORKING CONDITIONS

Maximum working pressure:

DN15-150: 16 bar  
 DN200: 14 bar  
 DN250: 9 bar  
 DN300: 6 bar

Maximum working temperature : +120 °C